



# LED Floodlight



# OUTDOOR

## POWER

Safe power solutions for garden and light DIY use

### FEATURES

- Die-cast housing
- Sturdy steel bracket for simple instalations
- Pre-wired 0.3m H05RN-F 3G1.0mm2 cable
- IP68 connector
- PIR Sensor

### PRODUCT IMAGES



EFLDF10B40P-M5



EFLDF20B40P-M5




EFLDF30B40P-M5



EFLDF50B40P-M5

### TECHNICAL SPECIFICATIONS

	Size	Wattage	
EFLDF10B40P-M5	114mm x 71mm x 166mm	10W	800
EFLDF20B40P-M5	129mm x 72mm x 175mm	20W	1600
EFLDF30B40P-M5	144mm x 71mm x 190mm	30W	2400
EFLDF50B40P-M5	184mm x 70mm x 224mm	50W	4000

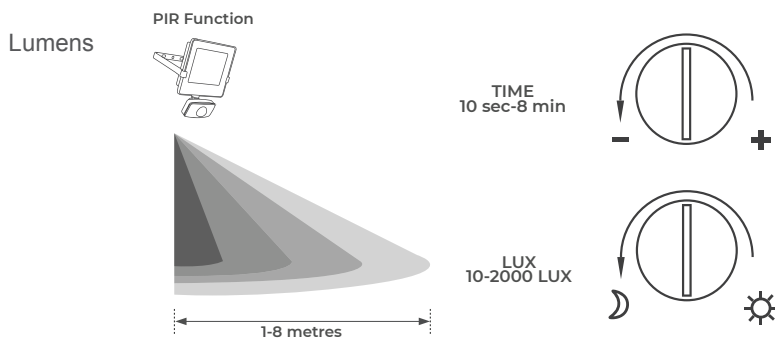

CAT NO.	WEIGHT (g)	EFFICACY (Llm/W)	CRI	FREQUENCY (Hz)	IK RATING	TEMP RANGE	AMBIENT TEMP RATED LIFE (°C)	L/B RATED LIFE
EFLDF10B40P	363	80	≥80	50	IK06	-20 to +45	25	70/50
EFLDF20B40P	413	80	≥80	50	IK06	-20 to +45	25	70/50
EFLDF30B40P	517	80	≥80	50	IK06	-20 to +45	25	70/50
EFLDF50B40P	775	80	≥80	50	IK06	-20 to +45	25	70/50

### INSTALLATION INFORMATION

#### Installation Instructions

To comply with regulations, installation must be carried out by suitably qualified competent person and in accordance with the current IEE Wiring Regulations (BS7671) and Building Regulations. A copy of the instructions must be left for the user/Maintenance engineer for future reference.

Masterplug Help Line  
**0845 194 7584**

Supplied by  
**Masterplug Ltd**  
Stafford Park 1 Telford TF3 3BD ENGLAND

Visit our website at  
**www.masterplug.com**